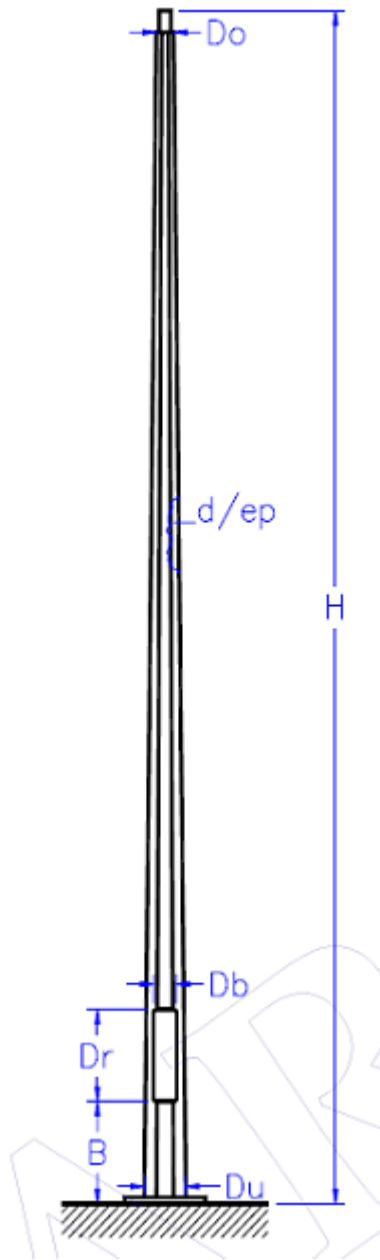






Free-standing tubular mast for 2 kW Small Wind Turbines



- Steel with corrosion protection finish (Zn)
- Straight Polygonal taper length of 15 meters (parts h1=8.1m, h2=7.4mtr.)
- Door opening at foundation plate
- square footplate 550 x550 mm
- Foundation bolts (4) M39
- Technical calculation conform NBN-EN 40-3-3:2003
- Safety factor: Class A 1.4
- Option: Inox safety cable and safety hooks (40pcs)

H m	CODE	d/ep mm	Du mm	Do mm	Kg	DbxDr 2x mm	B m	 mm	 mm	 mm	 m ²
15	ST/LRA150-89/101/363VP Keith_2K	3/4	363	88.9	396	139x600	0,6	290	400	39x1400	11,33